


CONCRETE STREET PATCH JOINT DETAIL
NOT TO SCALE

- NOTES:
- 1) ALL CONCRETE STREET PATCHES MUST BE 1-INCH THICKER THAN EXISTING PAVEMENT.
 - 2) NO LESS THAN 1/2 PANEL SHALL BE REPLACED.
 - 3) EDGE OF TRENCH SHALL BE AT LEAST 2- FEET FROM EDGE OF PANEL.
 - 4) MUST NOT DISTURB SUBGRADE UNDER ADJOINING PANELS.
 - 5) MINIMUM 4-INCHES COMPACTED GRANULAR BASE PLACED ON COMPACTED SUBGRADE PER STANDARD STREET SPECIFICATIONS.

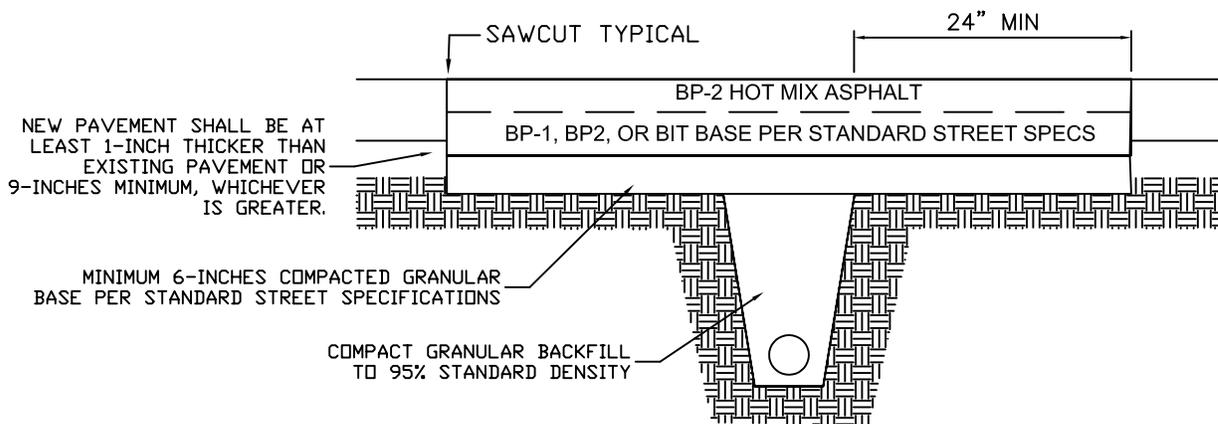

FLEXIBLE PAVEMENT STREET PATCH DETAIL
NOT TO SCALE

DRAWING NO. 309

CITY OF JACKSON, MISSOURI

K.A.P. 03/31/11
Approved Date

Revisions

STREET PATCH DETAIL