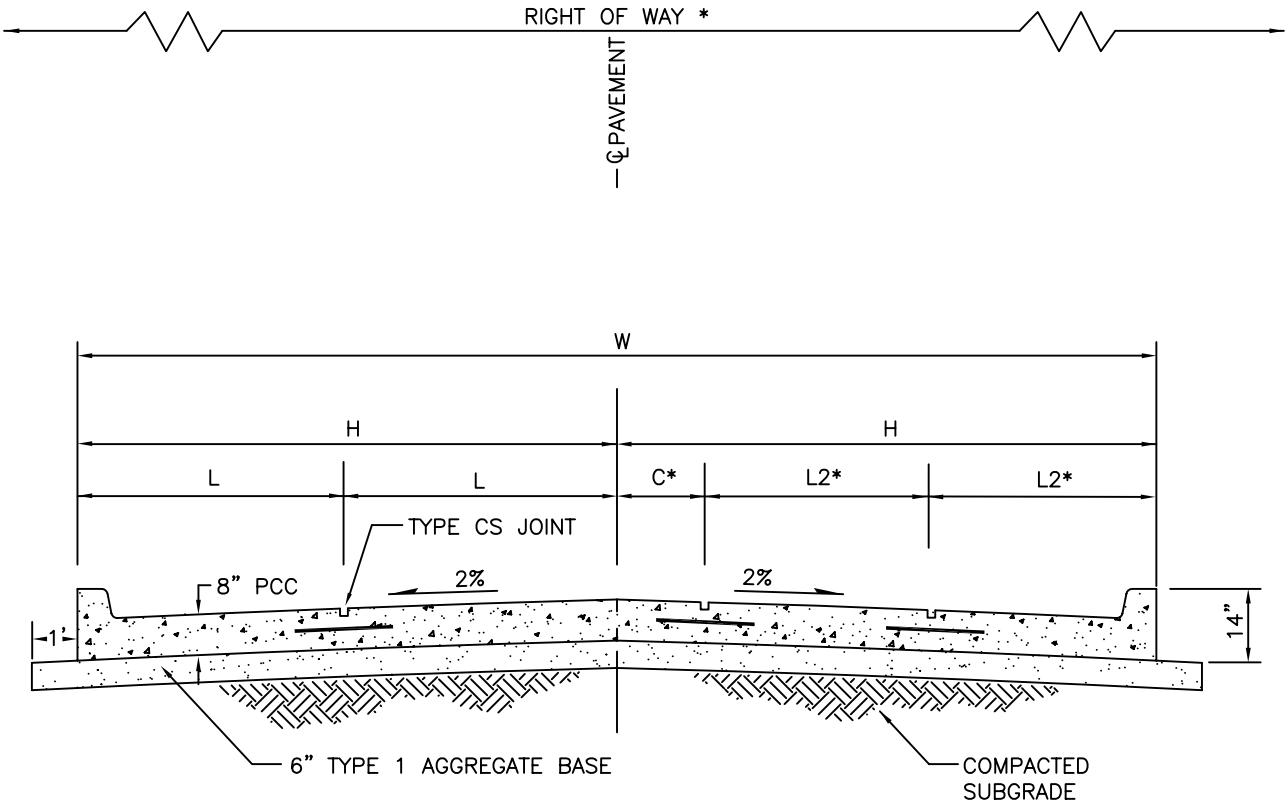

LANES	2	4	5
ROW	64'	80'	100'
W	42'	50'	64'
H	21'	25'	32'
L	10.5'	12.5'	
L2*			13'
C*			6'
*DIMENSION FOR 5-LANE STREET			



INTEGRAL UPRIGHT CURB SECTION

NOTES:

1. ALL P.C. CONCRETE SHALL BE 28-DAY 4,000 PSI STRENGTH.
2. SEE "SAW CUT AND CONSTRUCTION JOINT" STANDARDS FOR DETAIL.

DRAWING NO. 303	CITY OF JACKSON, MISSOURI
K.A.P. Approved 03/31/11 Date Revisions	PORTLAND CEMENT CONCRETE STREET STANDARD (COMMERCIAL-ARTERIAL)