


TYPE E EXPANSION JOINTS @ 75' INTERVALS #5 DOWELS; 18" LONG

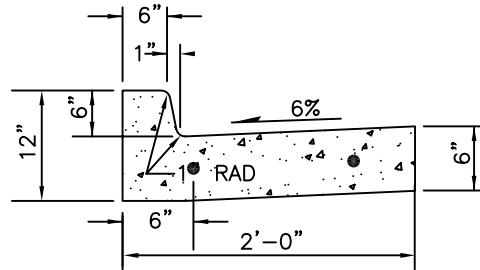

LIP CURB AND GUTTER SECTION

UPRIGHT CURB AND GUTTER SECTION

NOTES:

1. MISSOURI STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION 2004 SHALL APPLY PER SECTION 403: ASPHALTIC CONCRETE PAVEMENT
2. ALL P.C. CONCRETE SHALL BE 28-DAY, 4000 PSI STRENGTH.
3. INSTALL 1" TYPE "A" EXPANSION JOINTS IN CURB AND GUTTER SECTION AT P.C. AND P.T. OF CURB RADIUS OF INTERSECTIONS.
4. INSTALL SAW JOINTS IN CURB AND GUTTER SECTION AT 12 FT. MAXIMUM SPACING, SEAL WITH BITUMINUS JOINT SEALANT.
5. EDGE DRAINS SHOWN FOR EXAMPLE AND CLARITY, ONLY TO BE INSTALLED WHERE SPECIFIED. MAY BE SPECIFIED FOR CONCRETE OR ASPHALT STREETS WHERE NEEDED.
6. 32' STREET WITH PARKING ONE SIDE SHALL HAVE SIDEWALK ON ONE SIDE ONLY, ALL OTHERS SHALL HAVE SIDEWALKS ON BOTH SIDES.

DRAWING NO. 306

CITY OF JACKSON, MISSOURI

K.A.P. 03/31/11
Approved Date

Revisions

ASPHALTIC CONCRETE STREET STANDARD
(LOCAL-RESIDENTIAL)