


LANES	2	4	5
ROW	64'	80'	100'
W	42'	50'	64'
L	19'	23'	30'

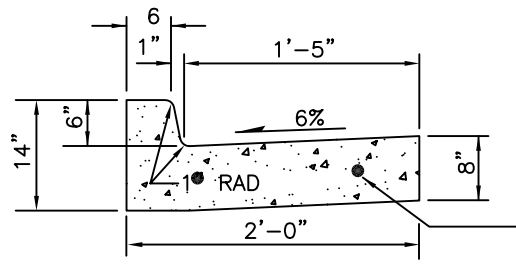

EXPANSION JOINTS ON 75' INTERVALS  
 #5 DOWELS; 18" LONG  
 (SEE TYPE "E" JOINT)

TYPICAL CURB AND GUTTER SECTION

NOTES:

1. MISSOURI STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION 2004 SHALL APPLY PER SECTION 403: ASPHALTIC CONCRETE PAVEMENT
2. ALL P.C. CONCRETE SHALL BE 28-DAY, 4000 PSI STRENGTH.
3. INSTALL 1" TYPE "A" EXPANSION JOINTS IN CURB AND GUTTER SECTION AT P.C. AND P.T. OF CURB RADIUS OF INTERSECTIONS.
4. INSTALL SAW JOINTS IN CURB AND GUTTER SECTION AT 15 FT. MAXIMUM SPACING, SEAL WITH BITUMASTIC JOINT SEALANT.

DRAWING NO. 308

CITY OF JACKSON, MISSOURI

K.A.P. 03/31/11  
 Approved Date

ASPHALTIC CONCRETE STREET STANDARD  
 (COMMERCIAL-ARTERIAL)

Revisions